



Factory installed sensor



Remove these bolts

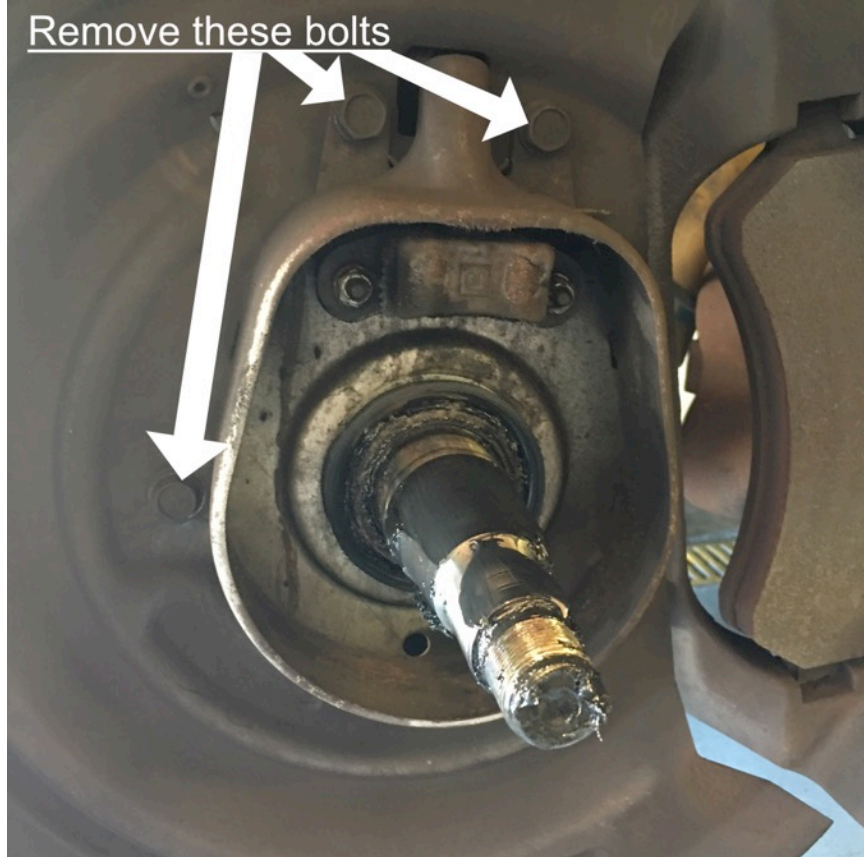

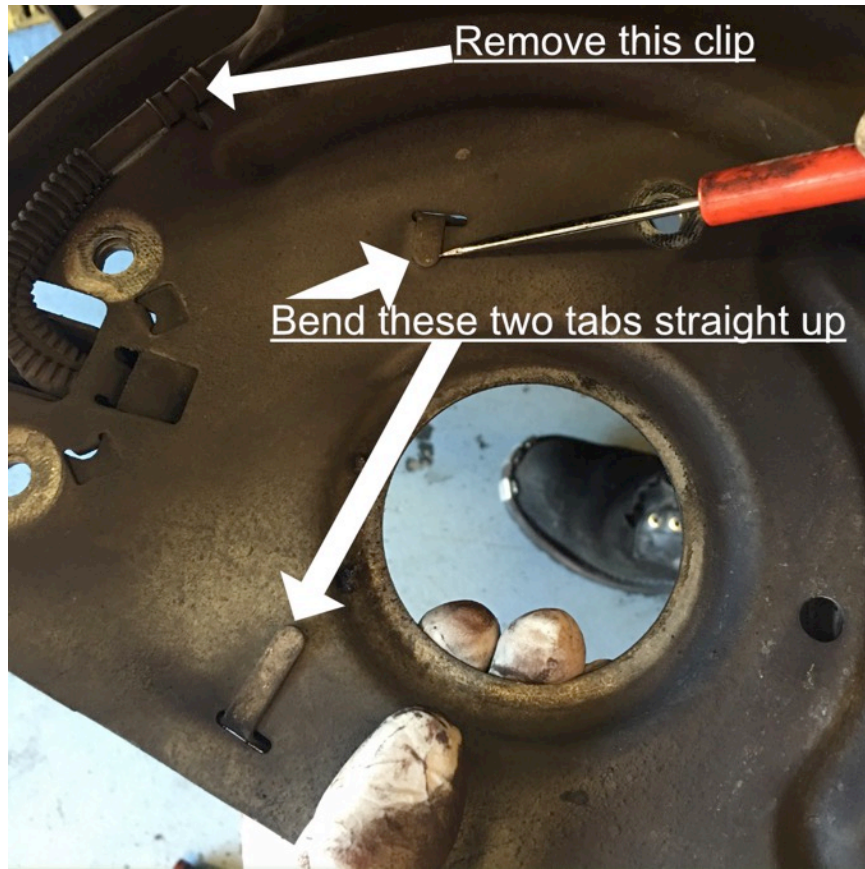

The factory sensor can now be removed from the backing plate.







Before removing the sensor from the mounting bracket, scribe bracket on the bottom edge of the sensor as shown.



Now install the new sensor aligning it with the scribe mark made on the previous step